## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: MI

**Supplier's address:** AOCE INFORMATION TECHNOLOGY S.R.L, STR. NICOLAE BALCESCU NR.12

CAMERA C2 MODULUL B58 ET.1 Bacau ROMANIA 600051

Mode	l identifier:	MJTD01SYL-L
------	---------------	-------------

Type of	light	source:
---------	-------	---------

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type	DC connector		
(or other electric interface)			
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with spe- cific dimmers


## **Product parameters**

Product parameters					
Parameter		Value	Parameter	Value	
General product parameters:					
· · · · · · · · · · · · · · · · · · ·	mption in on- 00 h), rounded st integer	8	Energy efficiency class	F	
dicating if it refo a sphere (360º)	s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º)	600 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	26005000	
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	7,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00	
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		0,50	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90	
Outer dimen-	Height	420	Spectral power dis-	See image	
sions without	Width	440	tribution in the	in last page	
separate con-	Depth	150			

trol gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-		
		Chromaticity coordi-	0,360		
		nates (x and y)	0,360		
Parameters for directional light sources:					
Peak luminous intensity (cd)	250	Beam angle in de-	110		
		grees, or the range			
		of beam angles that			
		can be set			
Parameters for LED and OLED light sources:					
R9 colour rendering index value	50	Survival factor	0,90		
the lumen maintenance factor	0,96				

(a)<sub>'-'</sub> : not applicable;

(b)'-': not applicable;

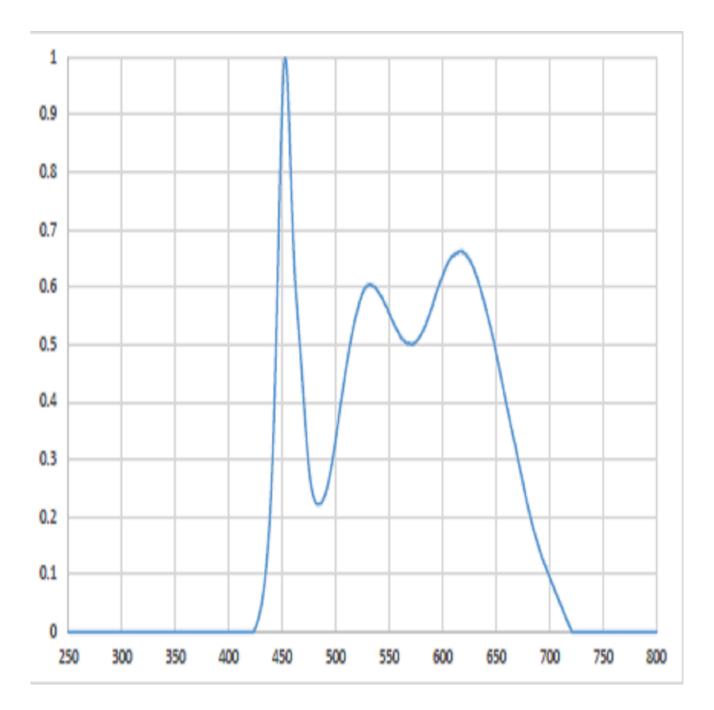

Model placed on the Union market from 05/08/2024



**EPREL registration number:** 2098050 <a href="https://eprel.ec.europa.eu/qr/20">https://eprel.ec.europa.eu/qr/20</a>

98050

Supplier: AOCE INFORMATION TECHNOLOGY S.R.L (Autho Website:

rised representative)

**Customer care service:** 

Name: AOCE INFORMATION TECHNOLOGY S.R.L Website:

Email: aoce-service@outlook.com Phone: +40-317800140

Address:

STR. NICOLAE BALCESCU NR.12 CAMERA C2 MODULUL B58 ET.1 Bacau ROMANIA 600051